



FAN7201

Two Speed Extraction Fan with Washable Metal Grease Filter



- G4 and Healthy Homes compliant for kitchen extract ventilation levels
- Washable metal grease filter
- Powerful centrifugal fan with two boost levels and low speed options
 - Boost level for kitchen installation
 - Boost level for laundry installation
 - Low speed for long term trickle ventilation
- Plate fascia and fine filter kit (DCT4529) available as front grille alternative



Front grille with removable dishwasher safe metal grease filter



DCT4529


COMPLIANCE

While it is 100mm in diameter the Cucina Kitchen fan, when it is used in a through wall application to a weatherproof cowl (DCT0018), exceeds and complies with the following regulations on the basis of its high pressure centrifugal fan, airflow performance, when installed to kitchen boost. Airflow performance for continuous operation on low speed is also provided.




Minimum Installed System Airflow Requirements - all exceeded by Cucina

Regulation	Speed	Kitchen Fans	Bathroom Fans
Healthy Homes Residential Tenancy	Kitchen Boost	50 l/s	25 l/s
New Zealand Building Code G4 Ventilation AS1 - Version 4	Kitchen Boost	50 l/s	25 l/s
	Low Speed	12 l/s	10 l/s

PERFORMANCE

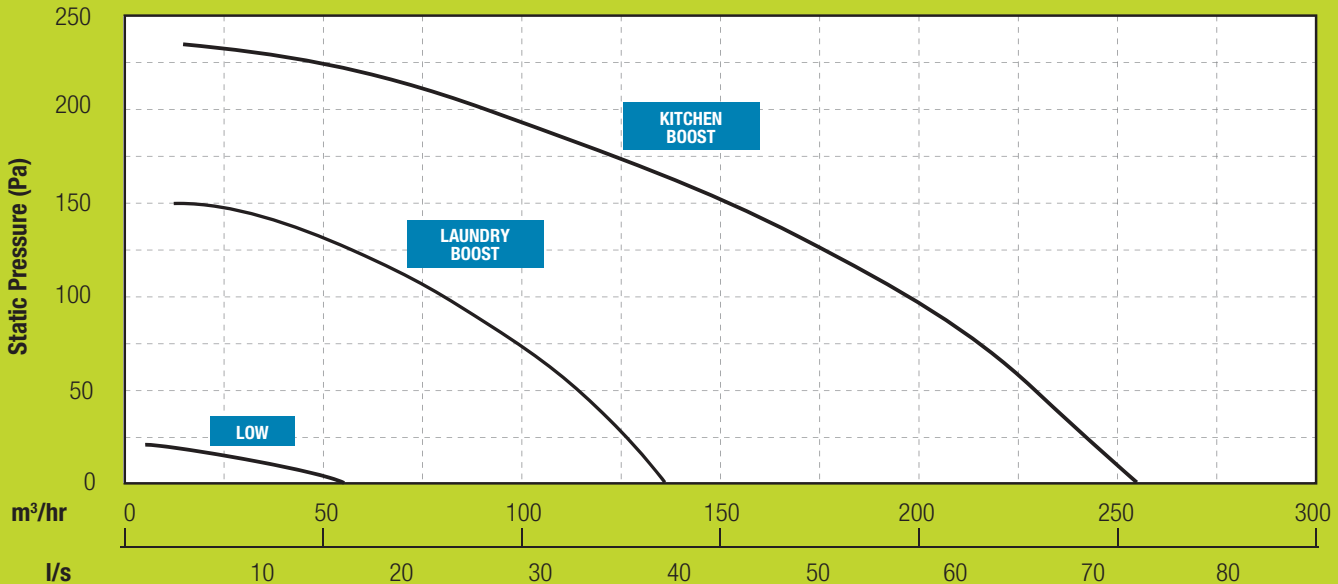


TECHNICAL SPECIFICATIONS


CUCINA	Duct (mm)	Fan Type	Fan Speed	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound db(A)	Switching	Order Code
						(l/s)	(m³/hr)				
	100	Centrifugal	High Medium	60 41	236 140	73 39	263 140	0.82 1.05	52 38	Pull Cord	FAN7201
	Plate Fascia and Fine Filter Kit <i>(order separately)</i>										DCT4529
	Replacement Washable Metal Grease Filter <i>(order separately)</i>										DCT4521

WIRING DIAGRAM

220-240V AC 50 Hz

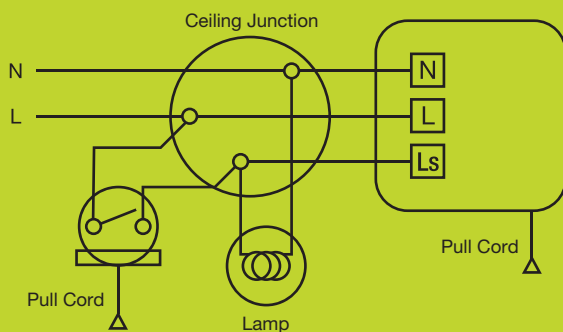

DIMENSIONS (mm)

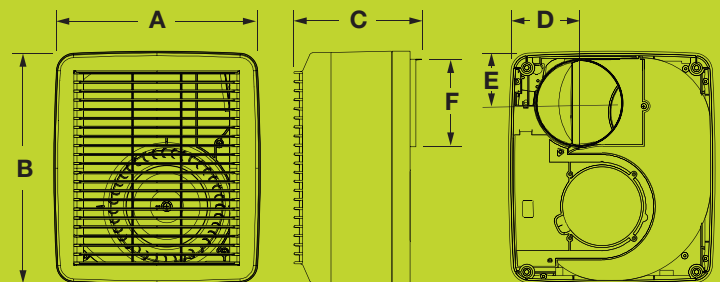

A	B	C	D	E	ØF
231	261	137	79	58	98



Complies with AS/NZS Standards
Specifications are subject to change without notice.